



Rims - Integral Bearing

- These rims are specially processed before powder coating to ensure stronger bonding of the paint which provides durability and long life.
- High speed integral hub, rims complete with precision sealed ball bearing, oil seal and hub cap.
- Fits onto corresponding AXR25 axle at bottom of page.
- Key way collars can be fitted for solid drive (see page 50)



RW100-S20



RWSR100-S25



RW150-S25




RWW150-S25



RW200-S25





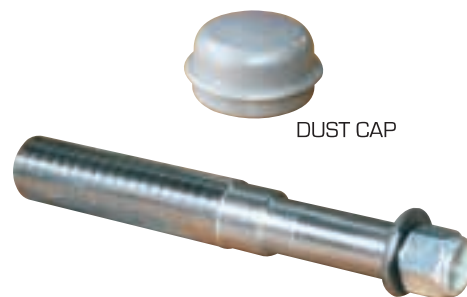

RWW200-S25



AXR25 Axle
[suits all rims except RW100, RWSR100]

DUST CAP

CODE			Bearing to bearing 	
	(mm)	(mm)	(mm)	(mm)
RW100*	100 (4")	65	80	20/25
RWSR100*	100 (4")	65	80	20/25
RW150	150 (6")	65	65	25/25.4
RWW150	150 (6")	95	65	25/25.4
RW200	200 (8")	65	65	25/25.4
RWW200	200 (8")	95	65	25/25.4
RWX200	200 (8")	136	65	25/25.4
RWY200	200 (8")	175	65	25/25.4

NB. For tyre options, refer to page 60

* no hub cap or seal option

Add bearing option to rim code. eg: RW100-S20 (20mm sealed bearing)